

TARALAY PREMIUM

gerflor.com





Gerflor[®]
theflooringgroup

TARALAY PREMIUM COMFORT

THE COMFORT RANGE ALL IN COLOUR

67 Colours creating soft or natural atmospheres

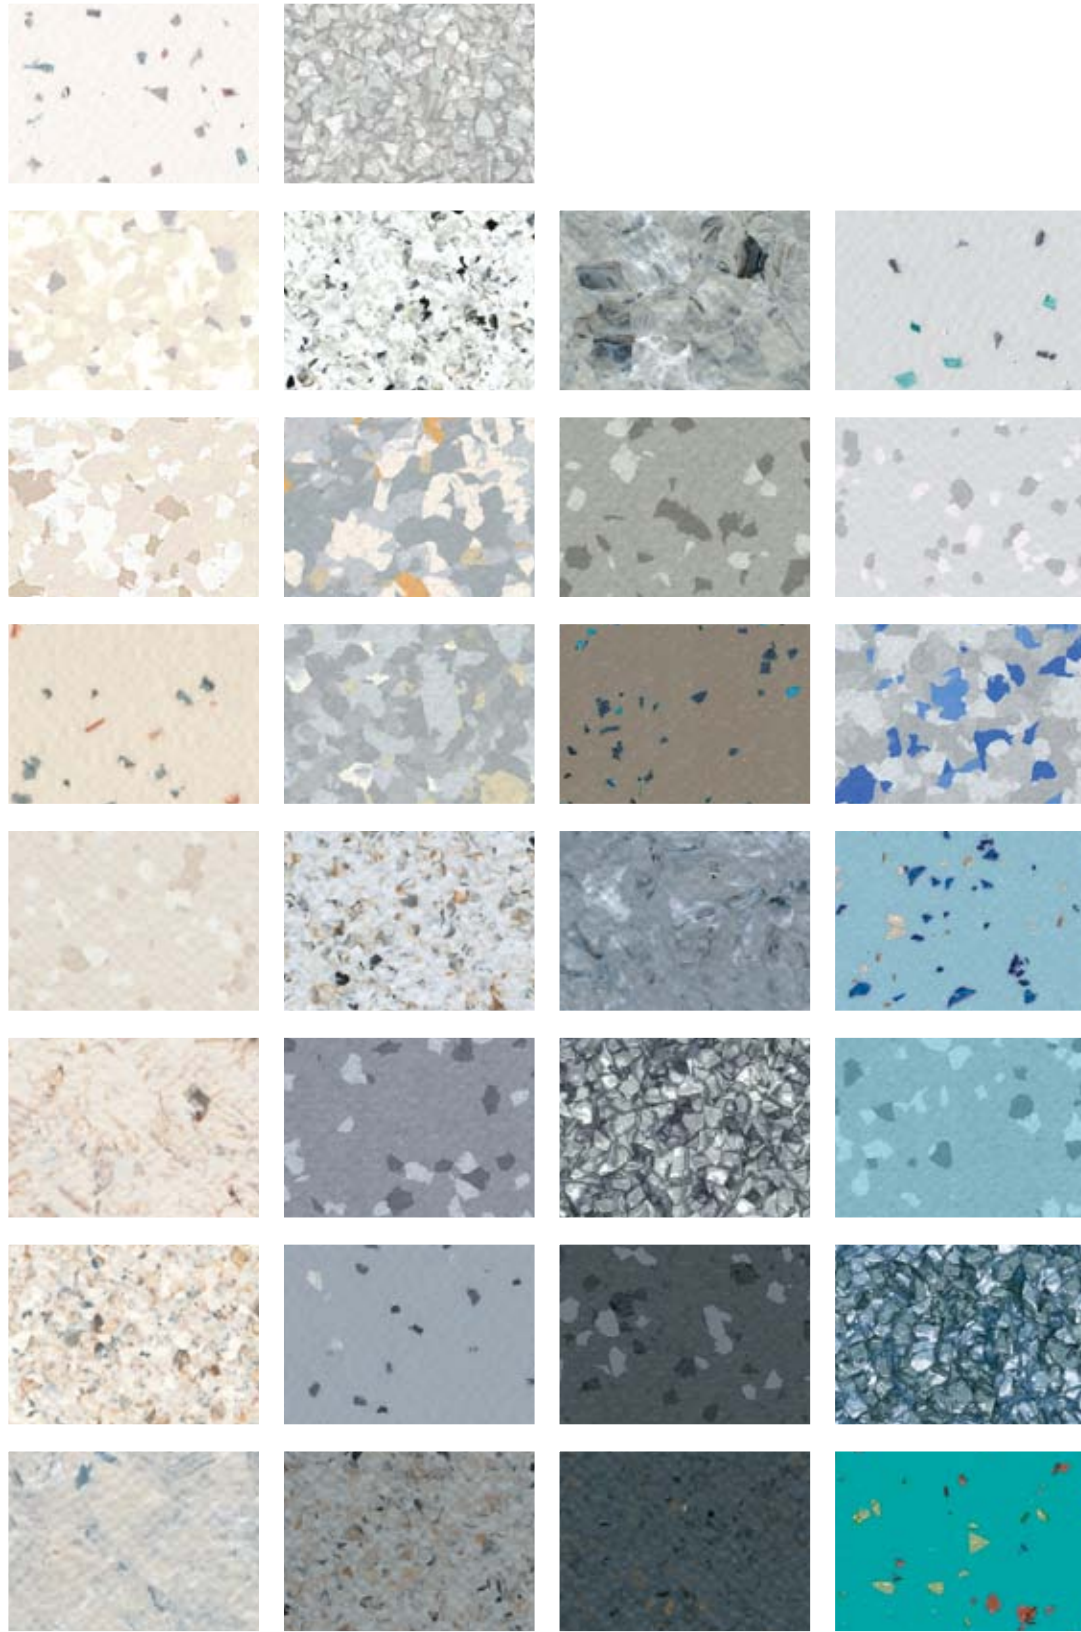

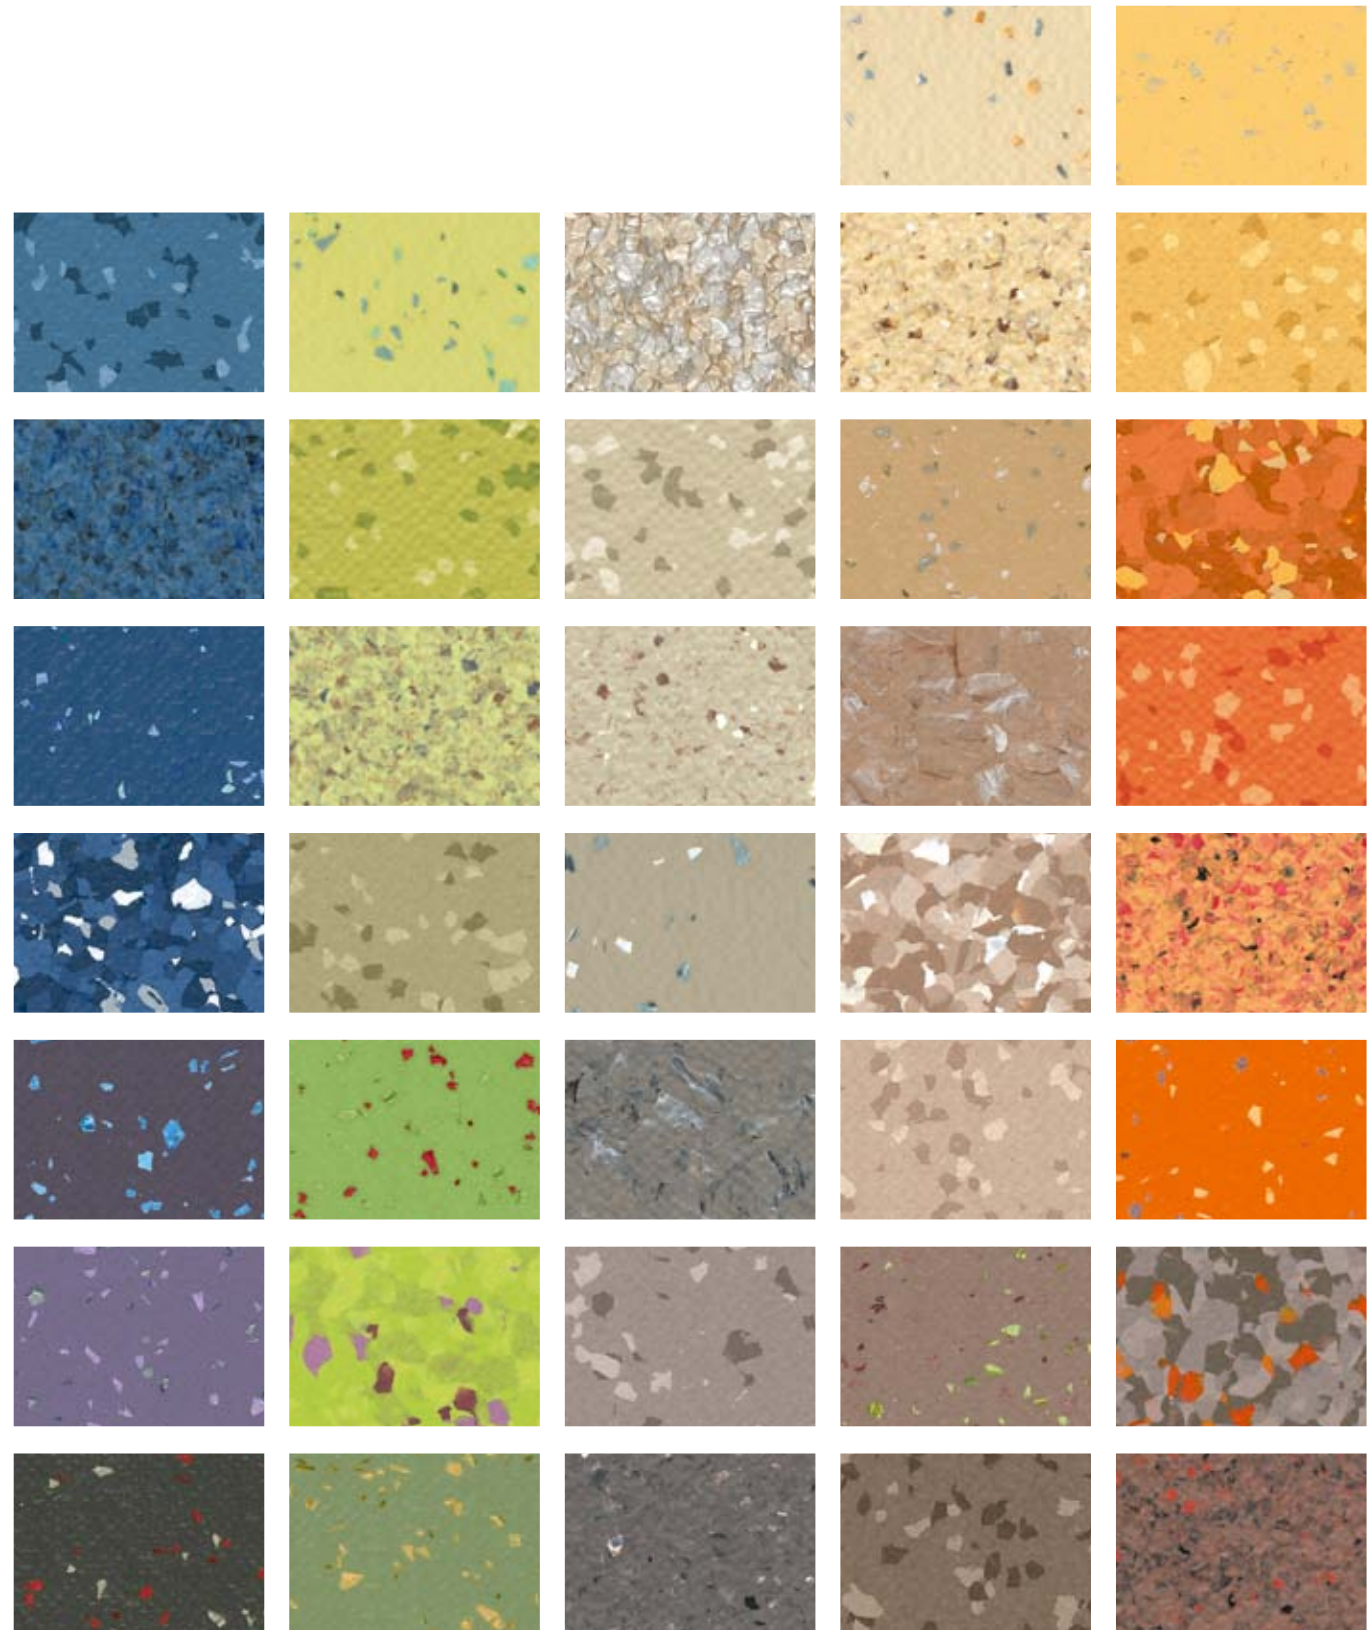

TARALAY PREMIUM

THE SOLUTION FOR EXTREME TRAFFIC AREAS


Healthcare



Education



Administration & Business offices

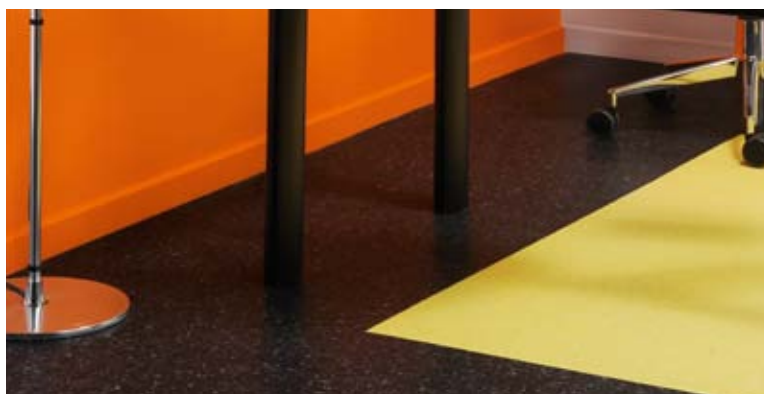

Retail



The images of floorcoverings in this catalogue have been reproduced as faithfully as printing technology permits.

FORUM COMFORT

 Comfort	16dB	 VHD	Protocolsol®	Sanosol®	 100% recyclable
---	-------------	---	---------------------	-----------------	---




WR : 2418

4511 Salado




WR : 2160

4328 Yanko



WR : 2172

3714 Smoky



WR : 2331

4468 Yaqui



WR : 2160

4324 Kamelik



WR : 0093

3701 Isar




WR : 2331

3710 Petchora




WR : 0122

8052 Congo



WR : 2261

8056 Cubango




WR : 2449

4107 Tage

WR: Welding rod - reference code 0585 + (WR) code

METALLICA COMFORT



WR : 0173

9753 Energy



WR : 0613

9330 Moon



WR : 2249

9415 Celeste



WR : 0254

9745 Cosmic

WR: Welding rod - reference code 0585 + (WR) code



FUSION COMFORT

 Comfort	16dB	 VHD	Protacosol®	Sanosol®	 100% recyclable
---	-------------	---	--------------------	-----------------	---



WR : 2253

4741 Lanzarote



WR : 0301

8011 Pinatubo



WR : 2227

4749 Vesuvio



WR : 2471

8240 Teide



WR : 0120

4745 Lopevi



WR : 2258

8022 Merapi

WR: Welding rod - reference code 0585 + (WR) code

BRAZILIA COMFORT

	16dB		Protacosol®	Sanosol®	 100% recyclable
--	-------------	---	--------------------	-----------------	--



WR : 0153

8386 Boa Vista




WR : 2532

4327 Caxias



WR : 2182

4729 Mato Grosso




WR : 2240

8157 Goias




WR : 2389

8269 Ipanema




WR : 2374

4478 Copacabana



WR : 2259

4477 Maceio




WR : 2245

8062 Campinas




WR : 2242

8577 Amazonas




WR : 2536

4514 Santarem



WR : 2258

4329 Bacabal




WR : 3002

3715 Picos




WR : 0304

8736 Recife



WR : 2531

3709 Ceara




WR : 0063

3707 Paraiba

WR: Welding rod - reference code 0585 + (WR) code

COSTA RICA COMFORT




WR : 0603

4743 Nublo*



WR : 2265

8387 Balsa*



WR : 2269

8587 Tortuga




WR : 2266

8395 Caballo*




WR : 0026

4794 Talamanca



WR : 2234

8590 Quetzal




WR : 0234

8167 Papagayo*




WR : 0337

4752 Sombra




WR : 2271

4456 Marina*



WR : 2268

8027 Cacao




WR : 2257

8191 Meseta



WR : 2272

4746 Jaguar*

WR: Welding rod - reference code 0585 + (WR) code
 *  : colours available in Tarastep (refer to page 35)

INDIANA COMFORT




WR : 2160

4001 Ofu




WR : 0577

4002 Manua




WR : 0586

4003 Tao




WR : 2521

4475 Felidu




WR : 2161

4009 Tufoa




WR : 2174

4029 Baduna




WR : 2525

4520 Musala




WR : 2526

4469 Pemba




WR : 2159

4030 Vanuatu




WR : 2524

8053 Anambas




WR : 2297

4513 Padang




WR : 2166

4015 Guinée




WR : 2422

8262 Rodrigues




WR : 2282

8059 Nicobar




WR : 2523

4135 Aldabra




WR : 2169

8242 Masirah




WR : 2530

3705 Sumbawa



WR : 0931

4133 Agalega



WR : 2271

4476 Wattaru



WR : 2522


4142 Penang

WR: Welding rod - reference code 0585 + (WR) code


TARALAY PREMIUM COMFORT

PRODUCT DESCRIPTION

▶ TARALAY PREMIUM COMFORT

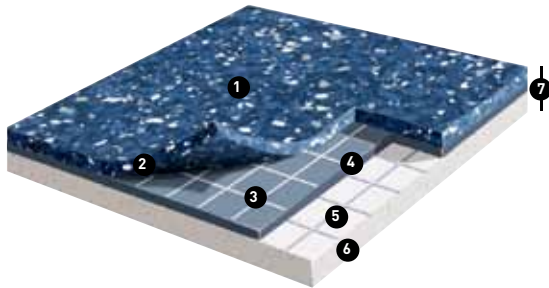

- 1 Protocolsol® treatment
- 2 Thick wearlayer with very densely pressed coloured chips
- 3 Glass fibre grid
- 4 Compact layer
- 5 Glass fibre mesh
- 6 VHD foam backing (Very High Density)
- 7 Sanosol® treatment
- 8 Anti-slip contrasting stair nose

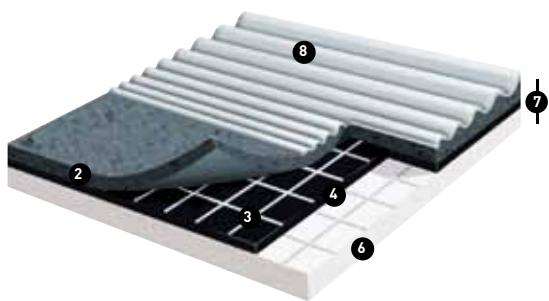

TARALAY PREMIUM COMFORT is a multilayered calendared and pressed acoustic Vinyl floorcovering available in 2m wide sheet (Group T wear rating).

The product comprises a ≥ 1 mm thick, pure, Vinyl wearlayer incorporating very densely pressed coloured chips, and a Very High Density (VHD) foam (yielding a 16dB sound insulation rating) reinforced with a glass fibre grid.

TARALAY PREMIUM COMFORT's calendared wearlayer is treated with Protocolsol®, a UV cured anti-glazing surface treatment with a minimum 25 μ m thickness to facilitate easy maintenance and permanently eliminates the need for acrylic emulsion (metallisation).

The product is antistatic (AS class 1) and incorporates Sanosol®, a fungistatic and bacteriostatic treatment.

▶ TARASTEP PREMIUM

TARASTEP PREMIUM is a multilayered calendared and pressed acoustic staircovering yielding a 17dB sound insulation.

It is an all-in-one staircovering incorporating the stair tread, a ribbed nosing in a tonal colour, a stair riser.

TARASTEP PREMIUM incorporates Sanosol®, a fungistatic and bacteriostatic treatment.

Installation

Installing is under the responsibility of the installer. Installation has to be in accordance with the standard procedures. Technical installation guidelines are available from our technical department. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise for 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using a Gerflor welding rod.

Maintenance

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of Vinyl or polyamide.

TECHNICAL DATA



	TARALAY PREMIUM COMFORT		TARALAY PREMIUM COMFORT		TARASTEP PREMIUM
	Forum Fusion - Metallica		Brazilia - Costa Rica Indiana		

DESCRIPTION					
Total thickness	EN 428	mm	3.25	3.00	3.30
	ASTM F386-02	inch	0.13"	0.12"	
Thickness of wearlayer	EN 429	mm	≥ 1.00	≥ 1.00	1.00
	ASTM F410	inch	≥ 0.04"	≥ 0.04"	
Weight	EN 430	g/m ²	3130 - 3260	2800 - 2810	3320
Width of sheet	EN 426	cm	200	200	100
	EN 426	feet-inch	6'6"	6'6"	
Length of sheet	EN 426	lm	25	25	22
	EN 426	feet	82'	82'	


CLASSIFICATION					
Norm / Product specification	-	-	EN 651	EN 651	EN 651
	ASTM F 1303-04	-	Type 1, Grade 1	Type C	
European classification	EN 685	class	34-42	34-42	34-42
Fire rating	EN 13501-1	class	Cfl-s1	Cfl-s1	Cfl-s1
	ASTM E648-08	class	Class 1	Class 1	
Static electrical propensity	EN 1815	kV	< 2	< 2	2
Slip resistance wet	DIN 51 130	class	R10	R10	-

PERFORMANCES					
Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	EN 649 / EN 651	group	T	T	T
Coefficient of friction	ASTM D2047	-	1	1	
Dimensional stability	EN 434	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN 433	mm	≤ 0.20	≤ 0.20	≤ 0.20
Residual indentation (value)	-	mm	0.10	0.10	0.10
Static Load	ASTM F970-00	inch	0.004	0.004	
Impact sound insulation	EN ISO 717-2	dB	16	16	17
Impact Insulation Class	ASTM E989-06	IIC	59	59	
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Chemical product resistance	EN 423	-	OK	OK	OK
Chemical & stain resistance	ASTM F925-02	-	Excellent	Excellent	
Fungistatic & bacteriostatic treatment	-	-	Sanosol®	Sanosol®	Sanosol®
Surface treatment	-	-	ProtecSol®	ProtecSol®	-

CE MARKING			
CE	EN 14041		

EXCLUSIVE PRODUCT BENEFITS

MORE DURABLE THAN A PRINTED FLOORING



Wear layer

The thickest wear layer in heterogeneous flooring


- Hardwearing floor

Colour within the whole thickness of the wear layer

- Bright and fade resistant colours, unique 3D effect

No transparent wear layer

- No “zooming” effect or alteration of the design, even with very heavy traffic



VHD foam backing

Made up of consistent oval shaped cells – preserving its shape

- Perfect acoustic (16dB) / Indentation resistance (0.08mm) compromise
- Comfort for hospital staff, patients, teachers, pupils...
- Shock absorption in case of fall



Manufactured separately for a controlled consistent thickness

- No shearing under rolling load effect



MORE EFFICIENT THAN A HOMOGENEOUS FLOORING

0% filler

- The best in the T group: the best resistance to abrasion on the market
- Bright colours not faded by chalk

A pure PVC wearlayer

- Accrued durability
- Resistance to extreme scratches

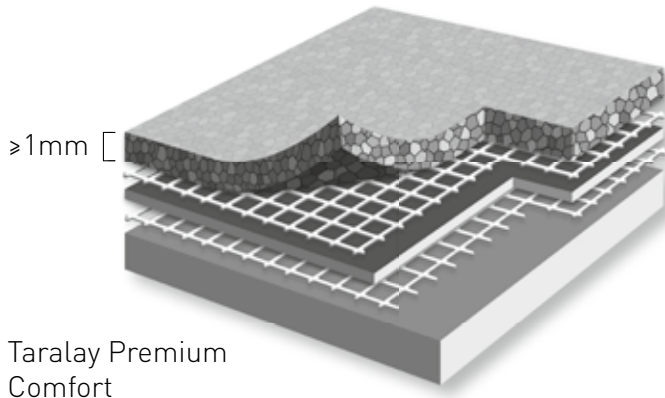

Double fibre glass reinforcement

As apposed to a single fibre glass mesh




- Durable two-dimensional stability: no deformity or dilation due to rolling heavy loads (Wheeled equipment and Automated Guided Vehicles)

Spring effect

- Even distribution of impacts on the surface, therefore a reduction in marks left by medical equipment and furniture

Double reinforcement preserving the VHD foam backing

- Durable acoustic performance / Impact resistance guaranteed
- Wheeled equipment can be easily rolled in all directions: starting force and pushing reduced by 35%



Usual

VHD

The only homogeneous design with a fibre glass grid

- No deformity over time

The flexibility of multi-layered

- 6dB of acoustic insulation in the compact version and possible combination with comfort version (16dB): a complete solution for your decoration project with an optimized budget

EXCLUSIVE PRODUCT BENEFITS

25 YEARS EXCELLENCE IN TERMS OF MAINTENANCE

PROTECSOL®

Thickness of treatment

- Greatest on the market (25µm)

Consistency of the thickness

- Due to an exclusive application method by electrostatic spraying

- **Easy maintenance:** No wax for life and no polish to avoid dust particles in the air in hospitals

Unique formulation

- Flexibility of varnish adapted to the wear layer



Durable resistance to scratches, scuffing, stains and chemicals

VARIETY AND DURABILITY OF COLOURS



Unlimited association of colours

- 120 colours in stock
- The same colours available in compact or comfort version
- Coordinated backgrounds and tonics from one design to another
- All your colours on demand with

My Taralay





Durability of your decoration project

- Colour within the whole thickness of the wear layer

TARALAY PREMIUM

ECO RESPONSIBLE SOLUTIONS



 Health & safety	Selected and responsible raw materials	NO heavy metal, NO solvent. NO formaldehyde, NO substance potentially subject to REACH* restrictions.
	Low VOC emissions	<ul style="list-style-type: none"> - Comply with AgBB protocol - Floorscore certified - Volatile Organic Compound (VOC) emissions of <250 µg/m³ after 28 days, using European procedures - No formaldehyde and carcinogenic emissions
	Fully hygienic solutions	The Sanosol® treatment prevents mould and bacterial (bacteriostatic) growth.
 Recycling	100% recyclable materials	Gerflor will help recycle its products at the end of their life cycle
	Uses recycled materials	<ul style="list-style-type: none"> - Made from up to 53% recycled content - 100% of recycled materials are inspected and exempt from REACH* restrictions.
 ISO 14001	ISO 14001 certified	Gerflor industrial sites hold ISO 14001 accreditation.
 Life-cycle analysis	Long life at low cost	Opting for high quality "no polish for life" flooring such as one of our patented ProtecSol® products, you can drastically reduce the usage of chemical product and water and ensure the best financial outcome but also the security of knowing the designs and colours will stand the test of time even in high traffic areas.

*REACH is the new European regulation on registering, assessing and authorising chemical products within the European Union.

Please do not hesitate to ask us for a full assessment of your project.

CONTRIBUTION TO LEED™ CERTIFICATION

LEED™ Certification (Leadership in Energy and Environmental Design) is an internationally recognized green building certification system. It provides third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO₂ emissions reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.

Gerflor contribution

- Low emitting materials: Floorscore certified products
- Products containing pre-consumer recycled materials
- 2 LEED™ specialists part of Gerflor staff



Reference:



KAUST University - Kingdom of Saudi Arabia
Photo credits: Oger international / KAUST University

Recycling



gerflor.com

ARCHITECTURE
DECORATION
SPORT
TECHNOSPECIFIC

ASIA: Gerflor Asia

Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd

Australia Tel: 1 800 060 785 - New Zealand Tel: 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH

Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux

Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbelgium@gerflor.com

CANADA: Gerflor International

Tel: +1-819-812-7310
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.

Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

FINLAND: Gerflor Oy

Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor - Service Express:

N°Azur 0 810 569 569 **N°Azur FAX 0 810 569 570**

e-mail: contactfrance@gerflor.com

GERMANY: Gerflor Mipolam GmbH

Tel: 0 22 41-25 30-0
e-mail: GerflorMipolam@Gerflor.com
Kunden-Service: kundenservice@gerflor.com
Tel: 0 22 41-25 30-131 - Fax: 0 22 41-25 30-100
SAT Service und Anwendungstechnik: Technik@Gerflor.com
Tel: 0 22 41-25 30-555 - Fax: 0 22 41-25 30-550

IRELAND: Gerflor Ltd

Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.

Tel: +39 02 90 78 60 12 r.a. - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina

Tel: +55 11 38 48 20 20 - Fax: +55 11 38 48 20 23
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East

Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: gerflorME@gerflor.com

NETHERLANDS: Gerflor BV

Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflorNL@gerflor.com

OTHER COUNTRIES: Gerflor International

Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o

Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA

Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor Moscow Office

Tel: + 7 499 783 63 69 / 81 - Fax: + 7 499 783 62 52
e-mail: gerflorrus@mospk.east.ru

SCANDINAVIA: Gerflor Scandinavia a.s.

Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA

Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd

Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor North America

Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com



FIND GERFLOR ON YOUR SMART PHONE

All Gerflor products, colours in full screen mode, associated documents and the My Taralay application

To connect, <http://m.gerflor.com>
Or with the help of a "Mobiletag" application, scan the code 2D or "QR code" here:



Committed to sustainable development

Gerflor
theflooringgroup