





# TARAFLEX® SPORT M COMFORT

MAXIMUM CUSHION, SAFETY AND INJURY PREVENTION

The first Taraflex® sports floor in ASTM F2772 C4 category. Gerflor's technology and innovation knowledge bring superior cushioning, comfort and safety during the practice of physical activities.

- ▶ Perfect for sports training camps
- ▶ ASTM F2772 Class 4:  $\geq 46\%$  -  $< 57\%$  shock absorption
- ▶ Ball bounce:  $\geq 96\%$
- ▶ Impact Protection Index (IPI): 88%
- ▶ Most cushioning to prevent short term and overuse injuries
- ▶ Triple density foam

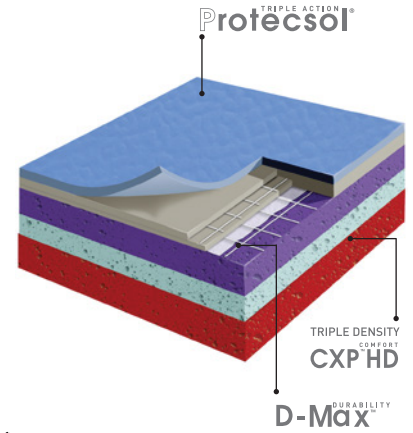


# TARAFLEX® SPORT M COMFORT

COMFORT D-DURABILITY  
CXP HD D-Max™

MAXIMUM COMFORT, SAFETY AND INJURY PREVENTION

TRIPLE ACTION  
Protēcsol™

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD DESIGNS	SOLID COLORS
<b>PRODUCT DESCRIPTION</b>				
Wearlayer	-	-	100% Pure Vinyl	
Surface Complex	-	-	<b>D-Max™</b>	
Foam Backing	-	-	Triple Density <b>CXP HD</b>	
Total Thickness	-	-	0.47" (12.5 mm)	
Wearlayer Thickness	-	-	0.08" (2.1 mm)	
Weight	-	-	1 lb/ft² (5.1 kg/m²)	
Roll Width	-	-	4' 11" (1.5 m)	
Roll Length	-	-	86'6" (26.4 m)	
<b>SPORT PROPERTIES</b>				
Sport Properties	ASTM F2772	-	Class 4	
Safety	ASTM F2772	≥ 10%	≥ 46% - < 57%	
Vertical Deformation	ASTM F2772	≤ 0.138" (≤ 3.5 mm)	≤ 0.138" (≤ 3.5 mm)	
Sliding Effect	ASTM F2772	80 - 110	80 - 110	
Ball Rebound	ASTM F2772	≥ 96%	≥ 96%	
Impact Protection Index (IPI)	IPI	-	88%	
Anti-Friction Burns	-	-	<b>Protēcsol™</b>	
<b>TECHNICAL CHARACTERISTICS</b>				
Chemical Product Resistance	ASTM D543	-	Excellent	
Resistance to a Rolling Load	EN 1569	≥ 1500 N	≥ 1500 N	
Fire Rating	ASTM E648	Class 1	Class 1	
<b>ENVIRONMENT HEALTH &amp; SAFETY</b>				
Ease of Maintenance	-	-	<b>Protēcsol™</b> / No wax for life	
Restriction Use of Harmful Chemicals	Mrc4 LEED v4	-	Complies with REACH	
Antimicrobial Treatment	ISO 22196	-	Inhibits spread of bacteria at 99.9%	
Allergen Free	-	-	OK	
Indoor Air Quality	EQc2 LEED v4	-	Floorscore™	
Recycled Content	Mrc3 LEED v4	-	22%	
<b>INSTALLATION METHOD</b>				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 95% RH (≤ 10 lb)		
Moisture Mitigation System	ASTM F2170 (F1869)	≤ 92% RH (≤ 10 lb)	ISOLSPORT	
Gerflor Dry-Tex System	ASTM F2170 (F1869)	100% RH (≤ 25 lb)	<b>DTX</b>	
Eco-Fit™ System	-	-	-	
<b>WARRANTY</b>	15-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions			