




TARALAY UNI COMFORT



TARALAY UNI COMFORT is a 6'6" (2 m) wide, multilayered sheet resilient flooring featuring a comfort backing reinforced with a fiberglass grid and a 28 mil, 100% pure vinyl colored wearlayer. Available in solid colors, it is complementary when used in combination with Taralay Impression Comfort printed design collection.


OUR PROTECSOL® SURFACE TREATMENT is a patented polyurethane surface treatment providing a no wax for life solution reducing the need for harsh cleaning chemicals.

NATURALLY BACTERIOSTATIC to limit the spread of infections.

- ▶ ISO 22196 certified at 99%

CONTRIBUTES TO A SUSTAINABLE ENVIRONMENT

- ▶ 100% REACH compliant
- ▶ Recycled content 17%
- ▶ Extremely low VOC and allergen-free
- ▶ FloorScore® certified
- ▶ Third party certified product-specific Type III EPD available

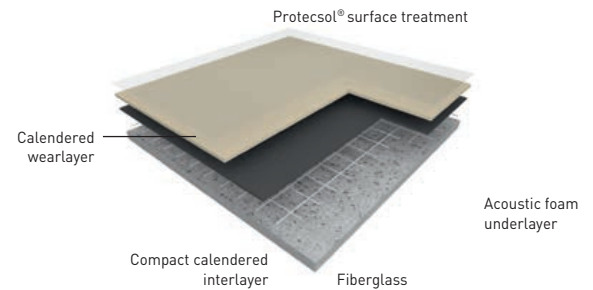

6260
DARK BLUE

6261
BLUE

6262
TURQUOISE

6263
ANIS

6264
OLIVE

6265
BROWN



6267
BEIGE


6268
SUN

6269
ORANGE

6270
TOMETTE

0778
ANTHRACITE

6271
GREY



6273
WHITE

TARALAY UNI COMFORT



6' 6"

Protocolsol®

FloorScore®

EPD®

DESCRIPTION	STANDARDS	REQUIREMENTS	TARALAY UNI COMFORT
PRODUCT DESCRIPTION			
Reference Specification	ASTM F1303	-	Type 1, Grade 1 (Meets Requirements)
Backing	ASTM F1303	-	Type C
Surface Treatment / Maintenance	-	-	Protocolsol®/ No wax for life
Gauge Total Thickness	ASTM F386	-	0.12" (3.00 mm)
Wearlayer Thickness	ASTM F410	> 0.02" (0.5 mm)	28 mil (0.7 mm)
Roll Width	-	-	6'6" (2 m)
Roll Length	-	-	82' (25 m)
Coverage / Roll	-	-	538 ft² (50 m²)
Weight	-	-	0.47 lb/ft² (2300 g/m²)
PERFORMANCE			
Static Load (175 psi)	ASTM F970	≤ 0.005"	≤ 0.002" (≤ 0.05 mm)
Maximum Static Load Limit	ASTM F970	≤ 0.005"	600 psi
Abrasion	-	-	≤ 0.12 in³ (≤ 3 mm³)
Indentation - Residual (75 lb)	ASTM 1914	≤ - 0.012"	Meets Requirements
Flexibility	ASTM F137	> 1.5"	Meets Requirements
Coefficient of Friction	ASTM D2047	-	0.57 (Dry) / 0.68 (Wet)
Resistance to Heat	ASTM F1514	ΔE ≤ 8	Meets Requirements
Resistance to Light	ASTM F1515	ΔE ≤ 8	Meets Requirements
Dimensional Stability	-	-	Excellent
Impact Insulation Class (IIC)	ASTM E989 (ASTM E492)	-	59 dB
Chemical & Stain Resistance	ASTM F925	-	Excellent (results available upon request)
Fire Rating	ASTM E648	Class 1	Class 1
Smoke Density (Flaming and Non-Flaming)	ASTM E662	-	Meets Requirements
ENVIRONMENT HEALTH & SAFETY			
Antibacterial Activity: Combats MRSA, E. coli and S. aureus*	ISO 22196	-	Inhibits spread of infection at 99%
Allergen-Free	-	-	100% Allergen-Free
Plant Certifications	-	-	ISO 14001, ISO 9001
Production Waste	MRc3 LEED v4	-	100% Manufacturing Waste Recycled
MATERIALS & RESOURCES, BUILDING PRODUCT DISCLOSURE & OPTIMIZATION (BP0D)			
Sourcing of Raw Materials: Recycled Content	MRc3 LEED v4	-	17%
Restriction Use of Harmful Chemicals	MRc4 LEED v4	-	100% REACH Compliant
Environmental Product Declaration (EPD)	MRc2 LEED v4	-	Product-specific Type III EPD
Health Product Declaration (HPD)	Materials LEED v4	-	Self declared
MATERIALS & RESOURCES, INDOOR ENVIRONMENTAL QUALITY (IEQ)			
Indoor Air Quality / Low Emitting Materials	EQc2 LEED v4	-	FloorScore® Certified
TVOC after 28 Days	ISO 16000-6	-	< 70 µg/m³
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions.		

*The implementation of an effective cleaning method is the best defense against infection.



NO heavy metals,
CMR 1, or CMR 2

